

DIGITIZER

CR 30-X



Versatile high-volume digitizer

CR 30-X is a highly versatile high-throughput digitizer. It offers an ideal solution for any private and decentralized CR environment, especially with a high volume of imaging. CR 30-X can handle all general radiology, orthopaedics, chiropractic, Full Leg/Full Spine and dental applications.

Full data

The CR 30-X makes no compromises in image quality: it reads imaging plates at the high resolution of 10 pixels/mm for all image plate sizes.

HIGH-VOLUME TABLE-TOP CR SOLUTION.

- High throughput
- Table-top digitizer
- Broad range of applications
- Low cost of ownership
- Horizontal cassette insertion
- Mobile
- DICOM Ethernet

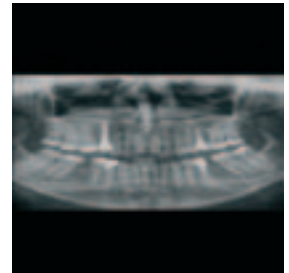


Table-top

With its table-top size, the CR 30-X digitizer can be placed easily at any location. It works with dedicated cassettes and was designed with ease of use in mind, for optimal handling, comfort and maintenance. When combined with a universal X-ray shield, the CR 30-X can be used inside the X-ray room.

Low total cost of ownership

Installing the CR 30-X can be done in a single day. With the special LED technology in the erasure unit, no additional electricity is required, so standard electrical outlets are sufficient. No preliminary electrical work means a lower set-up cost and simpler installation. With its modular, component-based design, it offers faster, easier and more cost-effective maintenance.

NX and MUSICA²

CR 30-X is available in combination with NX, Agfa HealthCare's image identification and quality control tool, for a highly efficient and optimized radiology workflow. CR 30-X is compatible with our 'gold standard' MUSICA² image processing, which has been specially adapted and tuned to further enhance the image quality.

Cassettes with memory

CR 30-X uses dedicated cassettes with an embedded memory that stores the data entered during identification. The built-in antenna card identifies the data by no-touch radiofrequency tagging. ID data and images are linked from the beginning throughout the entire electronic processing system.





CASSETTE SIZES

	Accepted Cassette Sizes	Spatial Resolution	Pixel Matrix Size
	Resolution		
CR MD4.0T General Cassette	35 x 43 cm (14 x 17")	10 pixels/mm	3480 x 4248
	35 x 35 cm (14 x 14")	10 pixels/mm	3480 x 3480
	24 x 30 cm	10 pixels/mm	2328 x 2928
	18 x 24 cm	10 pixels/mm	1728 x 2328
	15 x 30 cm	10 pixels/mm	1440 x 2928
CR MD4.0T FLFS Cassette	35 x 43 (14 x 17")	10 pixels/mm	3480 x 4406

technical

SPECIFICATIONS

GENERAL

Digitizer type

- Model number: 5175/200
- Single cassette feed
- Throughput:
 - 35 x 43 cm (14 x 17") = approx. 60 plates/hour
 - 35 x 35 cm (14 x 14") = approx. 60 plates/hour
 - 24 x 30 cm (9.5 x 12") = approx. 71 plates/hour
 - 18 x 24 cm (7 x 9.5") = approx. 76 plates/hour
 - 15 x 30 cm (6 x 12") = approx. 82 plates/hour

Display

- LED Status Indicator
- Status and error messages on external PC monitor

Greyscale resolution



- Data acquisition: 20 bits/pixel
- Output to processor: 16 bits/pixel square root compressed

Dimensions and weight

- (W x D x H): 693 x 701 x 546 mm (27.2 x 27.6 x 21.5")
- Depth including input tray: 769 mm (30.3")
- Weight: approx. 72 kg (158 lbs)

Power

- 220 - 240 V/50-60 Hz
Standby 120W, max 320W, 16A fuse
- 120V/60Hz (USA)
Standby 120W, max 320W, 15A fuse
- 100V/60Hz (Japan)
Standby 120W, max 320W, 15A fuse

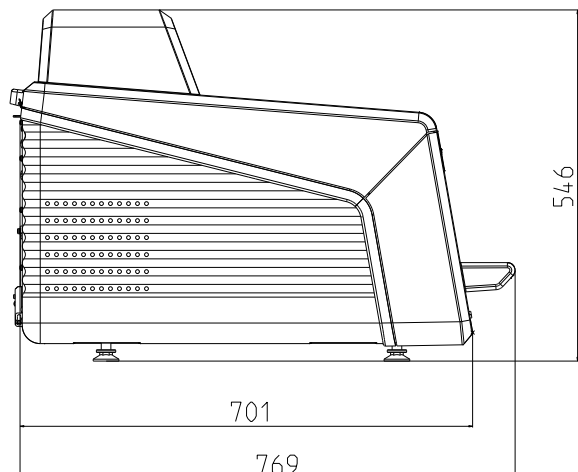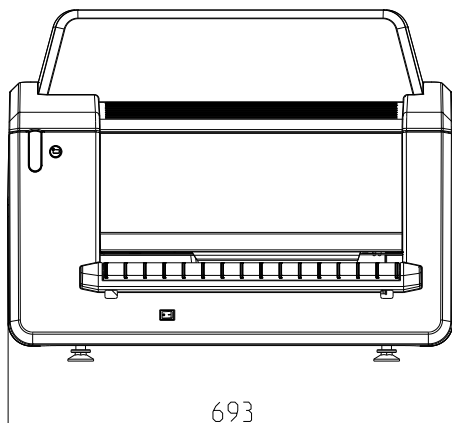

Minimum requirements

- CR MD4.0T General Cassette
- CR MD4.0T Full Leg/Full Spine Cassette
- CR MD4.0 General Plate
- NX

Environmental conditions

- Temperature: 15 - 30° C (59 - 86° F)
- Humidity: 15 - 80 % RH
- Magnetic fields: max. 3.8 μ T in conformance with EN 61000-4-8: level 2
- Rate of change of temperature: 0.5° C/minute (0.9° F)

Environmental effects

- Noise level: max. 65 dB (A)
- Heat dissipation: standby 120 W, max. 320 W

SAFETY

Approvals

- UL, cUL, CE

Transport details

- Temperature: -25 to +55° C (-4 to 131° F), -25° C for max. 72 hours, +55° C for max. 96 hours
- Humidity: 5 - 95 % RH

SAFETY

Region	Regulation	X-ray	Laser
Europe	EN 60601-1: 1990 + A1: 1993 + A2: 1995 EN 60601-1-2: 2001	Regulation: 1987	EN 60825 - 1:2001
USA	UL 60601-1 21CFR part 820: good manufacturing practice for medical devices	DHHS/FDA 21 CFR part 1002, subchapter B	DHHS/FDA 21 CFR parts 1040, 10 and 1040, 11
Canada	CSA22.2 No.601.1 No.601.1.2		

Why Agfa HealthCare?

Agfa HealthCare is a global leader in the fast growing market of integrated IT and imaging systems, offering healthcare facilities a seamless flow of information and a 360° view of patient care. The company has a unique, holistic approach, enabling it to provide in-depth clinical know-how and fully integrated hospital-wide solutions. These specialized solutions integrate IT and imaging systems for Radiology, Cardiology, Mammography and Orthopædics. Agfa HealthCare's enterprise-wide IT platform integrates all administrative and clinical data within a healthcare facility and is designed to match the unique needs of specific healthcare professionals.

www.agfahealthcare.com

Agfa and the Agfa rhombus are trademarks of Agfa-Gevaert N.V., Belgium, or its affiliates. All other trademarks are held by their respective owners and are used in an editorial fashion with no intention of infringement. The data in this publication are for illustration purposes only and do not necessarily represent standards or specifications, which must be met by Agfa HealthCare. All information contained herein is intended for guidance purposes only, and characteristics of the products and services described in this publication can be changed at any time without notice. Products and services may not be available for your local area. Please contact your local sales representative at agfa.com for availability information. Agfa HealthCare diligently strives to provide as accurate information as possible, but shall not be responsible for any typographical error.

© 2011 Agfa HealthCare NV
All rights reserved
Printed in Belgium
Published by Agfa HealthCare NV
B-2640 Mortsels – Belgium
5R9FJ GB 00201107